

# 1 MPI Hands-On - Introduction to MPI

## 1.1 Parallel Computing

- Separate workers or processes.
- Interact by exchanging information.
- Data-Parallel. Same operations on different data. Also called SIMD.
- SPMD. Same program, different data.
- MIMD. Different programs, different data.

## 1.2 Communicating with other processes

Data must be exchanged with other workers;

- **Cooperative** — all parties agree to transfer data.
  - Message-passing is an approach that makes the exchange of data cooperative.
  - Data must both be explicitly sent and received.

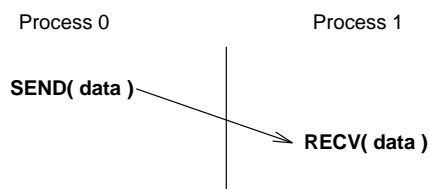


Figure 1: Cooperative—Communicating with other processes.

- **One sided** — one worker performs transfer of data.
  - One-sided operations between parallel processes include remote memory reads and writes.
  - An advantage is that data can be accessed without waiting for another process.

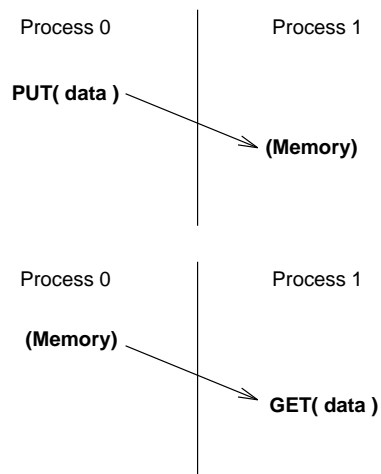


Figure 2: One sided-Communicating with other processes.

### 1.3 What is MPI?

- A *message-passing library specification*
  - message-passing model.
  - not a compiler specification.
  - not a specific product.
- For parallel computers, clusters, and heterogeneous networks.
- Designed to provide access to advanced parallel hardware for
  - end users.
  - library writers.
  - tool developers.

### 1.4 MPI Implementations

- Open MPI (a project combining technologies and resources from several other projects (FT-MPI, LA-MPI, LAM/MPI, and PACX-MPI))
- MPICH (Argonne National Laboratory).
- UNIFY (Mississippi State University).
- CHIMP (Edinburgh Parallel Computing Centre).

- LAM (Ohio Supercomputer Center).
- MPI for the Fujitsu AP1000 (Australian National University).
- Cray MPI Product for the T3D (Cray Research and the Edinburgh Parallel Computing Center).
- IBM's MPI for the SP.
- SGI's MPI for 64-bit mips3 and mips4.
- PowerMPI for Parsytec Systems.
- HP's MPI implementation.
- ...

## 1.5 Is MPI Large or Small?

- MPI is large (See this [openMPI link](#))
  - MPI's extensive functionality requires many functions.
  - Number of functions not necessarily a measure of complexity.
- MPI is small. Many parallel programs can be written with just 6 basic functions.
  - **MPI\_Init**– Initialise MPI.
  - **MPI\_Comm\_size**– Find out how many processes there are.
  - **MPI\_Comm\_rank**– Find out which process I am.
  - **MPI\_Send**– Send a message.
  - **MPI\_Recv**– Receive a message.
  - **MPI\_Finalize**– Terminate MPI.
- MPI is just right
  - One can access flexibility when it is required.
  - One need not master all parts of MPI to use it.

## 1.6 Where to use MPI?

- You need a portable parallel program.
- You are writing a parallel library.
- You have irregular or dynamic data relationships that do not fit a data parallel model.

Where *not* to use MPI:

- You can use HPF or a parallel Fortran 90.
- You don't need parallelism at all.
- You can use libraries (which may be written in MPI).

## 1.7 How To Use MPI? Essential!!

1. When possible, start with a debugged serial version.
2. Design parallel algorithm.
3. Write code, making calls to MPI library.
4. Compile and run using implementation specific utilities.
5. Run with a few nodes first, increase number gradually.

## 1.8 Getting started

### 1.8.1 Writing MPI programs I

First program with MPI ( [hello.c](#)). Write the following code and study the response.

```
1 #include "mpi.h"
2 #include <stdio.h>
3
4 int main( argc , argv )
5 int argc;
6 char **argv;
7 {
8     MPI_Init( &argc , &argv );
9     printf( "Hello world\n" );
10    MPI_Finalize();
11    return 0;
12 }
```

- `#include "mpi.h"`  
provides basic MPI definitions and types.
- `MPI_Init`  
starts MPI.
- `MPI_Finalize`  
exits MPI.
- Note that all non-MPI routines are local; thus the  
`printf`  
run on each process.

```
mpicc -o hello hello.c
mpirun -np 2 hello
```

### 1.8.2 Writing MPI programs II

Another Example (Again no message-passing) ( [hello1.c](#)):

```
1 #include <stdio.h>
2 #include <mpi.h>
3
4 int main(argc, argv)
5 int argc;
6 char *argv[];
7 {
8     char name[BUFSIZ];
9     int length;
10    MPI_Init(&argc, &argv);
11    MPI_Get_processor_name(name, &length);
12    printf("%s: hello world\n", name);
13    MPI_Finalize();
14 }
```

### 1.8.3 Writing MPI programs III

Another Example (Again hello and again no message-passing) ( [hello2.c](#)):

```
1 #include "mpi.h"
2 #include <stdio.h>
3 #include <unistd.h>
4
5 int main( argc, argv )
6 int argc;
7 char **argv;
8 {
9     int rank, size;
```

```

10 MPI_Init( &argc , &argv );
11 MPI_Comm_rank( MPLCOMM_WORLD, &rank );
12 MPI_Comm_size( MPLCOMM_WORLD, &size );
13 printf( "Hello world! I'm %d of %d\n", rank, size );
14 sleep(10);
15 MPI_Finalize();
16 return 0;
17 }

```

Two of the first questions asked in a parallel program are:

1. How many processes are there? Answered with *MPI\_Comm\_size*
2. Who am I? Answered with *MPI\_Comm\_rank*. The **rank** is a number between zero and **size-1**.

#### 1.8.4 Exercise - Getting Started

- Designing, compiling, and running a simple MPI program.
  - Write a program that combines all the "Hello world" programs above.
  - Execute several times and/or try different number of nodes. What does the output look like? Why it does differ?